


62V Series Channel Balance (Rusco)

OBSOLETE BALANCE
AND RELATED
COMPONENTS
ARE SHOWN FOR
REFERENCE ONLY

Old Style 5 to 1 Overhead

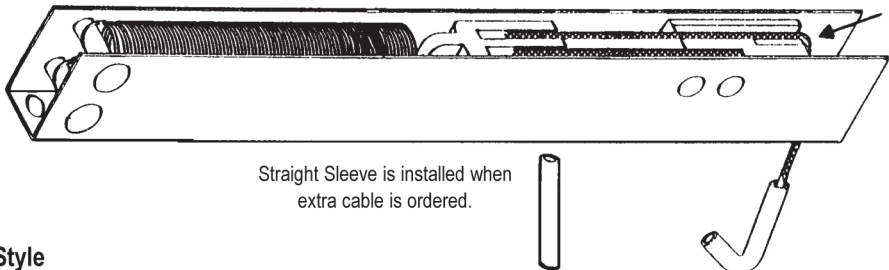


Balance is strung
with 3/64" Dia.
wire cable.




62V-500
Balance Clip


New Style

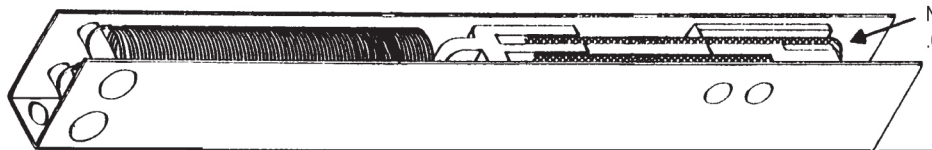

New style is strung with
.072 Dacron Cord.



Standard cord length is
determined from balance
to hook at bottom
of closed sash.




60-518

Supplied with our 60-518 clip
unless otherwise specified.



If ordering
900-21263
add -10



If ordering
900-17773
add -6

Ordering Information

- 1) Measure channel length.
 - 2) Identify number stamped on balance.
 - 3) Customer must determine how much cord hangs down from the balance when the window is closed. If more cord than the standard lengths shown is required, specify number of extra inches required when ordering by adding a plus sign (+) followed by number of extra inches needed.
 - 4) Determine the clip to be attached to balance. If ordering with our 900-17773 attached, add -6 after our part number.
- (e.g. If ordering a 153-D balance with our 900-17773 clip attached and 40" of cord is required, the part number would be 62-153D+10-6.)

General Information

- 1) Balances are supplied with either one or two springs. If the number stamped on your balance is followed by the letter "D" it denotes a double spring.

Length of Metal Channel	Number Stamped on Balance	Our Part Number		Weight Range (2 Balances)
13-1/4"	112	62V-112	Standard extended cord length from balance 20"	4 to 10 lbs.
13-1/4"	112	62V-112+	(Specify extra inches of cord required)	
13-1/4"	112-D	62V-112D	Standard extended cord length from balance 20"	10 to 18 lbs.
13-1/4"	112-D	62V-112D+	(Specify extra inches of cord required)	
16-1/4"	122	62V-122	Standard extended cord length from balance 25"	6 to 12 lbs.
16-1/4"	122	62V-122+	(Specify extra inches of cord required)	
16-1/4"	122-D	62V-122D	Standard extended cord length from balance 25"	12 to 22 lbs.
16-1/4"	122-D	62V-122D+	(Specify extra inches of cord required)	
19-3/4"	153	62V-153	Standard extended cord length from balance 30"	8 to 16 lbs.
19-3/4"	153	62V-153+	(Specify extra inches of cord required)	
19-3/4"	153-D	62V-153D	Standard extended cord length from balance 30"	16 to 28 lbs.
19-3/4"	153-D	62V-153D+	(Specify extra inches of cord required)	
23-3/4"	163	62V-163	Standard extended cord length from balance 36"	10 to 18 lbs.
23-3/4"	163	62V-163+	(Specify extra inches of cord required)	
23-3/4"	163-D	62V-163D	Standard extended cord length from balance 36"	18 to 32 lbs.
23-3/4"	163-D	62V-163D+	(Specify extra inches of cord required)	
28-1/4"	183	62V-183	Standard extended cord length from balance 40"	10 to 16 lbs.
28-1/4"	183	62V-183+	(Specify extra inches of cord required)	
28-1/4"	183-D	62V-183D	Standard extended cord length from balance 40"	16 to 34 lbs.
28-1/4"	183-D	62V-183D+	(Specify extra inches of cord required)	

Please contact account manager for pricing.