

ARCHITECTURAL

MONUMENTAL DOUBLE-HUNG WINDOWS

Architectural
Monumental
Double-Hung Windows

CUSTOM SIZING!

in $\frac{1}{8}$ " increments

SECTION REFERENCES

Styles & Size Ranges.....	183
Window Details	184
Performance Data.....	269

ARCHITECTURAL MONUMENTAL DOUBLE-HUNG WINDOWS

Features

FRAME

A Heavy-duty extruded aluminum cladding protects the frame exterior, providing low-maintenance durability.

Standard cladding finish meets AAMA 2604. An optional finish that meets the AAMA 2605 standard is also available.

B Wood frame members are treated with a water-repellent wood preservative for long-lasting* protection and performance.

Installation flange extends 1 1/2" around the perimeter of the unit to help properly position the unit in the opening. Installation clips are standard for increased structural anchoring to building members. Mounted around the frame perimeter, the clips rotate into position and can be bent into place against the framing members to suit all jamb conditions.



SASH

C Heavy-duty extruded aluminum cladding protects the sash exterior, providing low-maintenance durability.

D Wood sash members are treated with a water-repellent wood preservative for long-lasting* protection and performance. Radii are made of laminated continuous pine veneers. Lineal components are solid or engineered wood with a pine core.

E Weatherstripping throughout the unit provides long-lasting* energy-efficient seal.

F Silicone glazing bead combined with two-sided silicone tape helps provide superior weathertightness.

GLASS



G High-Performance™ glass options include:

- Low-E4® glass
- Low-E4® SmartSun™ glass
- Low-E4® Sun glass

Tempered glass and other glass options are available. Contact your Andersen supplier. (Glass option must be specified.)

PATTERNEED GLASS

Patterned glass options are available. See page 12 for more details.

For more information about glass, patterned glass, grilles, TruScene® insect screen and installation accessories, see pages 12–32 or visit

andersenwindows.com

Accessories

Sold Separately.

Extension Jambs

Standard jamb depth is 4 9/16". Extension jambs are available for the following wall thicknesses:

- 5 1/4"
- 6 9/16"
- 7 1/8"



Insect Screen Frames

Choose full insect screen or half insect screen (shown above).

Half insect screen configurations allow ventilation without affecting the view through the upper sash. Available in colors to match product exteriors.

INSECT SCREENS

EXCLUSIVE

TruScene® Insect Screen

TruScene insect screens are made with a micro-fine stainless steel mesh that's one-third the diameter of our aluminum screen wire. They provide over 50% more clarity than our conventional insect screens. They also let more sunlight and fresh air into the home.

Conventional Insect Screen

Conventional insect screens have powder-coated aluminum screen cloth.

Casings

Curved interior casings are available in the same profiles as other Andersen® products. Curved exterior aluminum and wood casings are available in matching radii and a variety of profiles.

* For complete information on our limited warranties, visit andersenwindows.com or contact your Andersen supplier.

** Actual wood is Sapele, also known as African mahogany, a non-endangered hardwood with color and characteristics similar to American mahoganies.

Exterior

Specify a unit exterior option and an interior option to complete your order.



Hardware

Sold Separately.

Hardware



Sash Locks




Sash Lifts

Andersen architectural monumental double-hung windows feature unique sash locks and lifts. They are available in **bright brass**, bronze and white. Custodial locks that allow tilting for cleaning but limit access and prevent unauthorized tilting of the sash are standard. Contact your Andersen supplier for more information.

Bold names denote finish shown.

Hardware Finishes



Printing limitations prevent exact finish replication. See your Andersen supplier for actual finish samples.

Style and Size Range

Scale $1\frac{1}{8}$ " = 1'-0" (1:96)


Standard sizes are available to complement Andersen® 400 Series and 200 Series products.

For complete standard window and minimum rough opening dimensions and opening specifications visit andersenwindows.com or contact your Andersen supplier for details.




Custom sized in $1\frac{1}{8}$ " increments between minimum and maximum width and height dimensions.


Single Archtop Single-Hung & Double-Hung Window

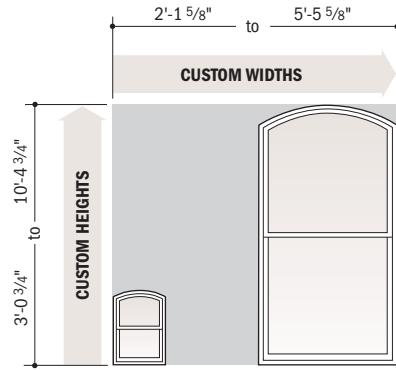


Rectangle Single-Hung & Double-Hung Window

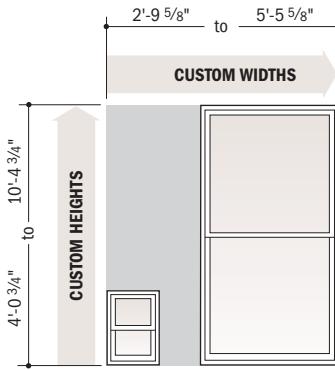


Springline™ Single-Hung Window

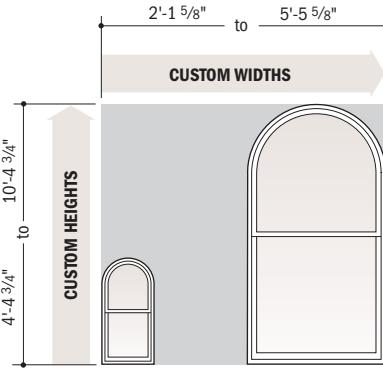

Unequal Leg Arch Single-Hung & Double-Hung Window

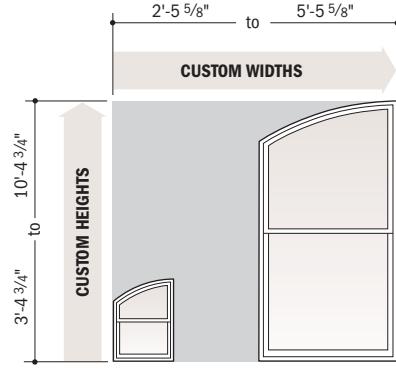


Springline™ Flanker Single-Hung Window

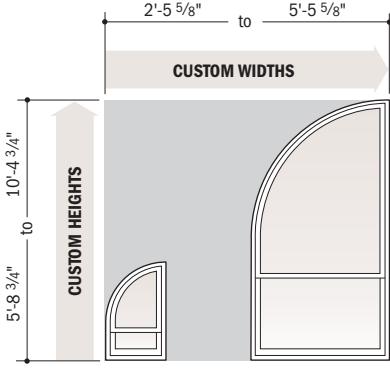


All windows may be order fixed over fixed.

Some larger windows may be required to be ordered fixed over fixed. A fixed upper sash is standard when upper sash height is greater than 48".

Twin Springline™ Archtop Single-Hung & Double-Hung Window

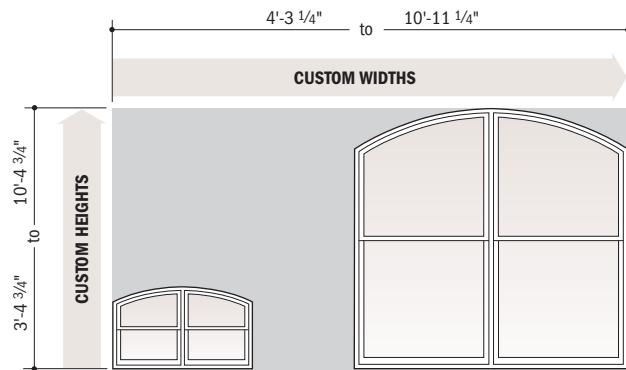

Twin Springline™ Flanker Single-Hung Window


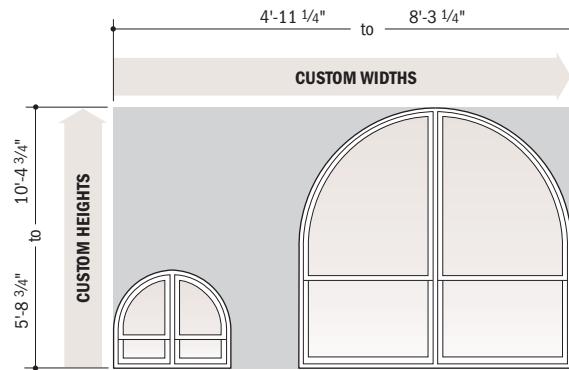


• Rough openings may need to be increased to allow for use of building wraps, flashing, sill panelling, brackets, fasteners or other items. See installation information on page 33.

ARCHITECTURAL MONUMENTAL DOUBLE-HUNG WINDOWS

Monumental Double-Hung Window Details

Scale 1 1/2" = 1'-0" (1:8)

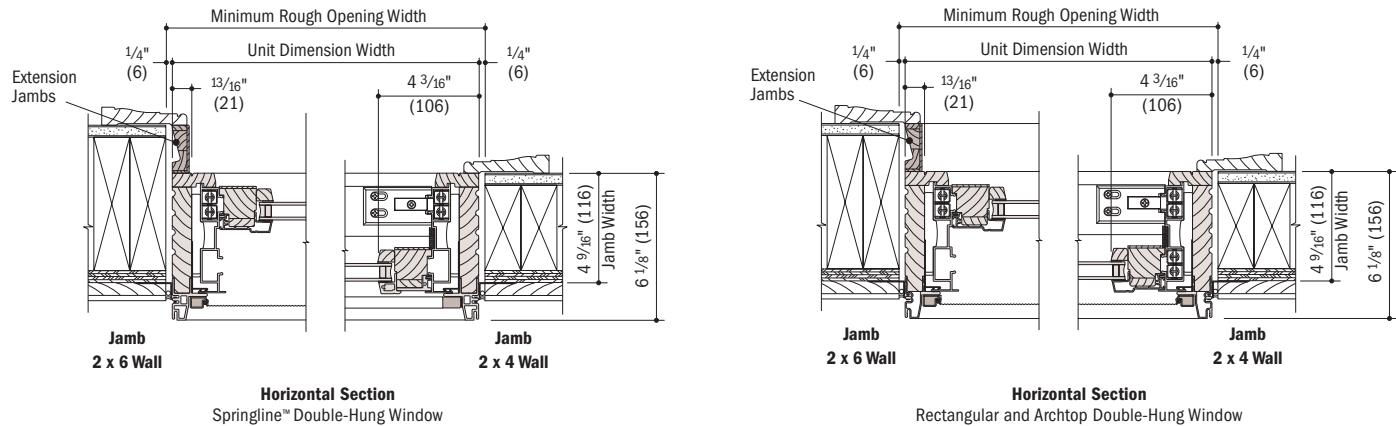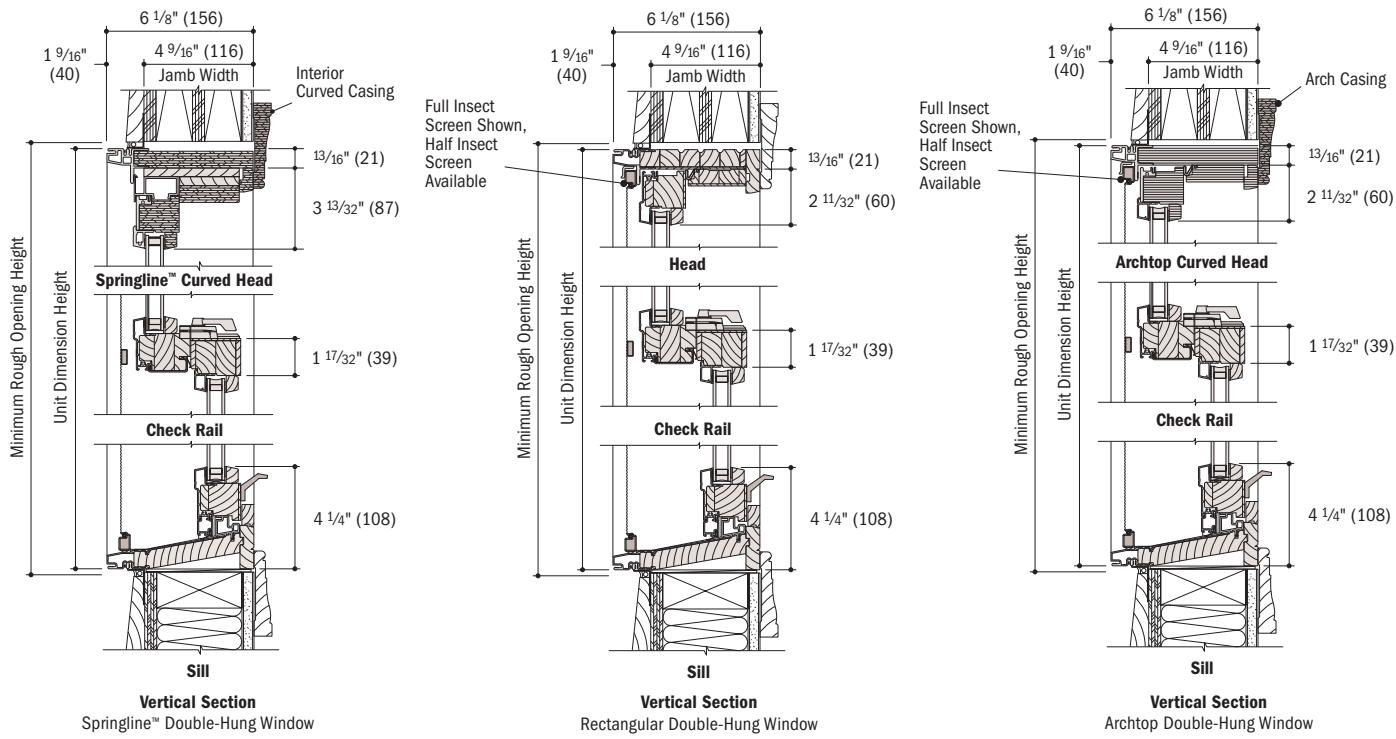

- 4 9/16" jamb width measurement is from backside of installation flange.
- Light-colored areas are parts included with window. Dark-colored areas are additional Andersen® parts required to complete window assembly as shown.
- **Rough openings may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items. See installation information on page 33.**
- Details are for illustration only and are not intended to represent product installation methods or materials. Refer to product installation guides at andersenwindows.com.