

For more information visit:  
[DoorsWindowsHardware.com](http://DoorsWindowsHardware.com)

**FIG. 7 APPLICATION OF STANDARD MAXIM SINGLE ARM OPERATOR  
(SILL MOUNT VERSION) (LOW PROFILE)**


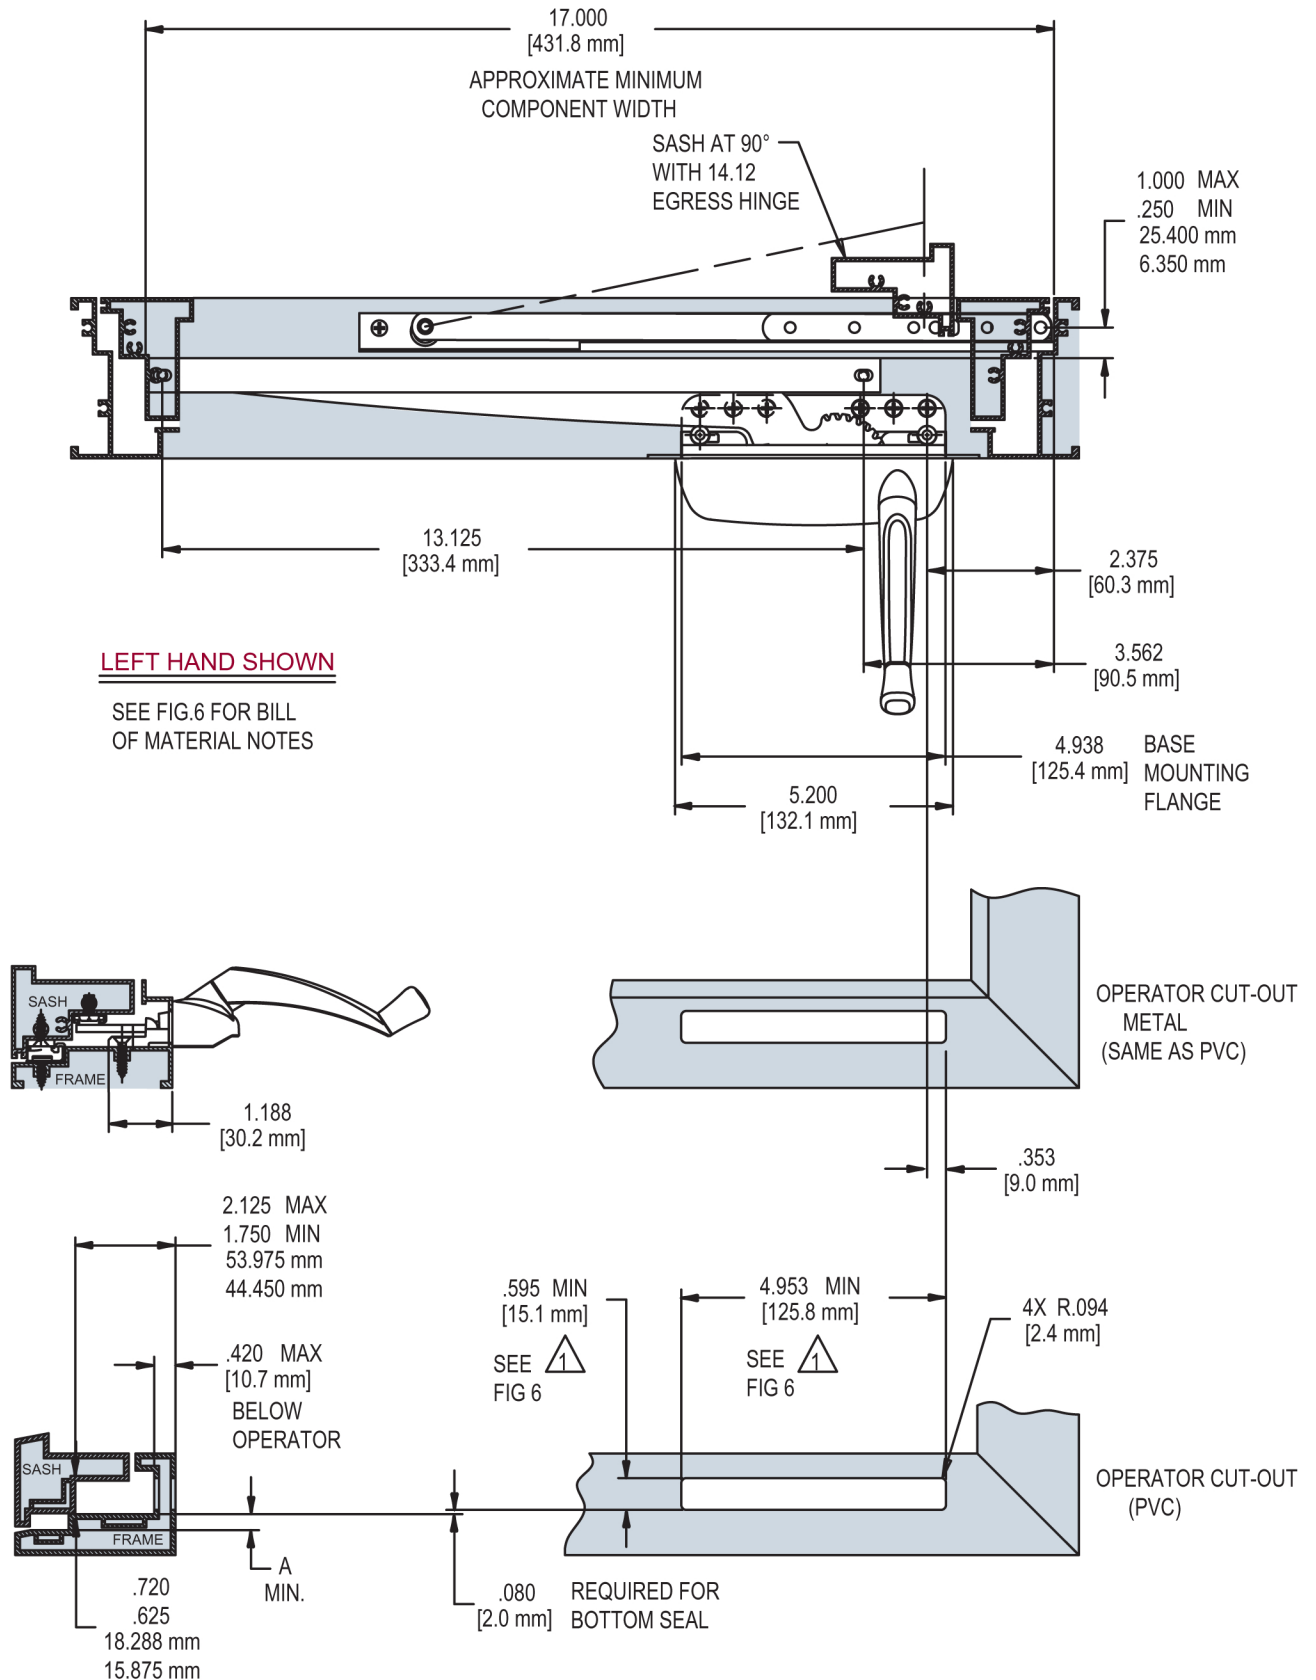


FIG. 8 APPLICATION OF MAXIM SINGLE ARM OPERATOR (CONTINUED)  
(SILL MOUNT VERSION) (LOW PROFILE)

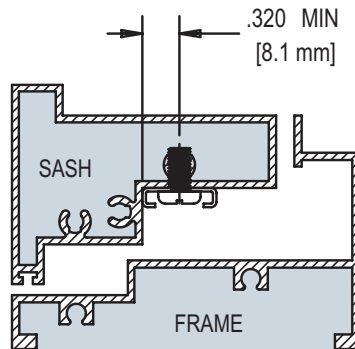

## 30175 TRACK PLACEMENT

| HARDWARE SHOWN FOR LEFT HAND WINDOW, SEE FIG.5 |                     |
|------------------------------------------------|---------------------|
| PART NUMBER                                    | DESCRIPTION         |
| 52.03.XX.011                                   | SINGLE ARM OPERATOR |
| 30175                                          | TRACK               |
| 14.12.00.XXX                                   | EGRESS HINGE        |
| 11454.XX                                       | CONTOUR HANDLE      |
| 31882                                          | GASKET              |

| HINGE                                    | "A"           |
|------------------------------------------|---------------|
| 14.12.00.XXX                             | .322 [8.2 mm] |
| OTHER 14<br>SERIES<br>CASEMENT<br>HINGES | .275 [7.0 mm] |


### NOTE:

-  HOLD THIS DIMENSION AS CLOSE TO THE MINIMUM AS MANUFACTURING TOLERANCES ALLOW. A CLOSE FITTING CUT-OUT HELPS TO STABILIZE THE OPERATOR AGAINST ROCKING
- GASKET 32658 IS REQUIRED ON PVC AND METAL PROFILES FOR AN IMPROVED AIR AND WATER SEAL

**FIG. 9 STANDARD MAXIM SINGLE ARM OPERATOR  
(SILL MOUNT VERSION) (LOW PROFILE)**

STAINLESS STEEL VERSION AVAILABLE

52.03.XX.011 LEFT HAND SHOWN

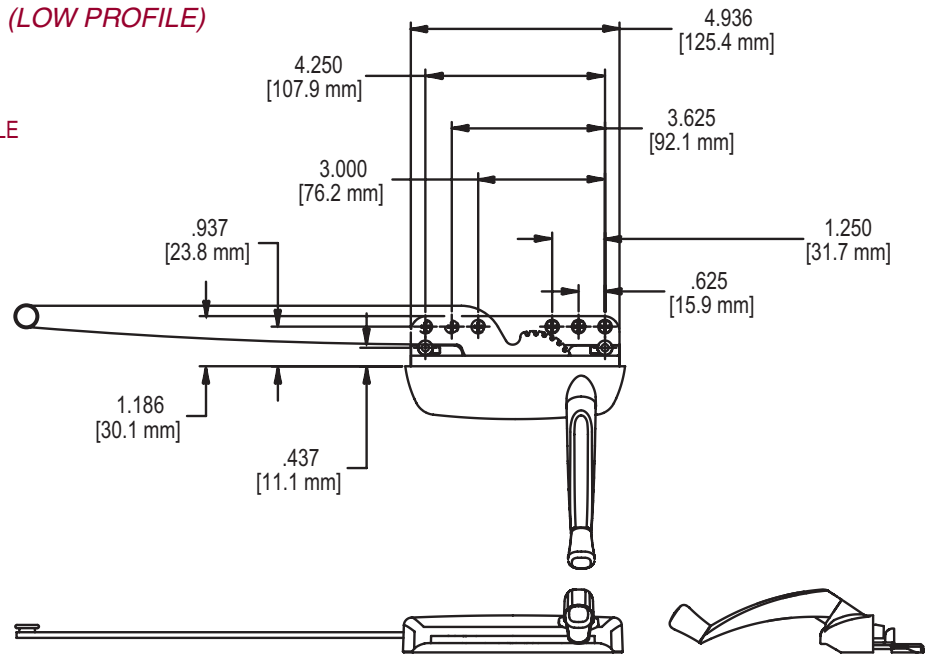


RECOMMENDED SCREWS:


(QTY 6)(PN 19240.XX)#8 X 1 FLAT  
HEAD SHEET METAL (SEE TRUTH  
TIPS FOR MORE INFORMATION)

(QTY 2)REAR MOUNT:#8-32 X 3/8 PAN HEAD  
MACHINE SCREW PN 19545.XX

**FIG. 10 MAXIM COVER 41212.XX /HANDLE 11329.XX(RH) (SHOWN)**

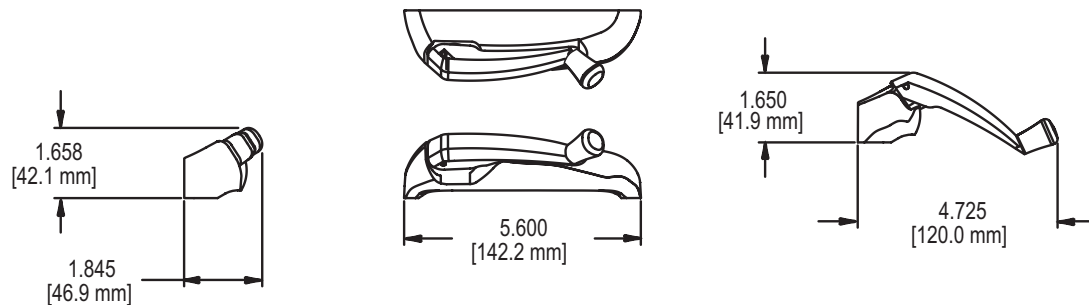

**FIG. 11 TRACK 30175**

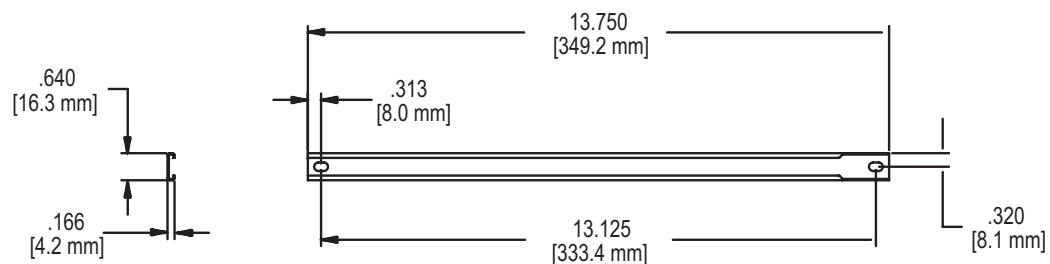

RECOMMENDED SCREWS:

(QTY 2)(PN 19214.XX)#8 X 1 FLAT  
HEAD SHEET METAL (SEE TRUTH  
TIPS FOR MORE INFORMATION)